



Wisdom Audio

# Regenerative Transmission Line™ Subwoofers

## Some History...

Ever since the beginning of the development of high performance enclosed dynamic loudspeakers in the 1920's and 1930's, designers have worked to create a transducer/enclosure system that can both extend the range of reproduction to the lowest possible frequencies *and* also operate with very high dynamic range while maintaining very low distortion.

Until recently, significant trade-offs have been unavoidable, with bandwidth, efficiency, enclosure size and maximum output being bound by physical laws governing conventional enclosure systems, sometimes known as "Hoffman's Iron Law."

Alternatives to infinite baffle sealed boxes were developed; specifically; the bass reflex system, the horn, quarter-wave pipes and band-pass hybrids. All of these systems were an attempt to increase dynamic range at low frequencies. These systems used single frequency (or odd wavelength) resonant energy, based on Helmholtz (Bass Reflex) or Quarter Wave Pipe (QWP) resonators.

While these systems have offered some 'one-dimensional' performance increases such as gains of 3 to 5 dB efficiency and increased maximum output (and reduced distortion) at single bass frequencies (reflex) or at frequencies of a 1 to 3 to 5 relationship (such as 30, 90, 150Hz from the QWP), they have always exhibited serious limitations relative to low coloration and the ability to maintain low distortion over a broad range of bass frequencies. The audible result is of a tendency for "one-note" (or three-note) bass colorations combined with inconsistent distortion profiles depending on the program material, among a number of other problems beyond the scope of this discussion.

In short, they traded off quality for quantity of bass... something we were unwilling to do.

## Our Goals

At Wisdom Audio, we wanted to create a low frequency system that could sustain dynamic contrasts and low coloration in the bass range that was comparable to our world-class planar magnetic transducers.

While there are many other important design attributes involved in perfecting the new subwoofer system, we started with design criteria of the low frequency technology that required two basic attributes:

- First, it would have the transient response and linearity to match the performance of, and create a seamless transition to, our high resolution planar magnetic drivers;
- Secondly, we wished to create a low frequency technology that could both substantially extend low frequency response while exhibiting very high dynamic range with exceptionally low distortion over a broadband, multi-octave range.

After reviewing all current technology, we realized that something quite different would be required. We wanted the leveraged output of a tuned system without any of the single-frequency dynamic effects and colorations. We realized that we needed something like a tuned Helmholtz or tuned pipe effect, but one which, instead of resonating at a single frequency, was instead tuned to enhance the output over the complete bandwidth of the woofer system. The goal was to realize a frequency-independent waveform re-enforcement.

The developed system has the attributes of reducing cone displacement (and therefore distortion) and enhancing acoustic output substantially and equally over the operating range of the subwoofer.

Conventional bass reflex and tuned pipe systems depend on using the output of one side of the driver diaphragm to drive an enclosure or pipe to generate one or more resonances that are spaced far apart on frequency. Less commonly, some designs use the second side of the driver diaphragm to drive an independent, second resonant system, with its own fundamental resonant frequency. In both cases, individual resonant frequencies are realized and output is enhanced at certain frequencies while cone motion is reduced. But cone motion is *increased* (yielding greater distortion) at other frequencies within the pass band. As the old saying goes, existing systems “borrow from Peter to pay Paul.”

## The Regenerative Transmission Line™ Subwoofer

The Wisdom Audio Regenerative Transmission Line™ subwoofer utilizes the acoustic output of both sides of the woofer diaphragm to drive the same internal transmission line. By doing so, we are able to realize a type of transitional labyrinth that uses both sides of the diaphragm to alternate back and forth, enhancing the output of the system over a broad frequency range in a multi-modal manner.

To try to illustrate what happens, we will explore the system interactions of an RTL™ subwoofer, over a range of 20 Hz to 80 Hz.


While there are many critical subtleties to the architecture, a basic description of the structure is that of a folded pipe, with optimized cross section area from beginning to end, with a specific relationship to the surface area of the transducer diaphragm. One side of the transducer diaphragm is mounted to drive the beginning of the pipe (the closed end), emitting acoustic energy through the length of the pipe to its opening. The second side of the diaphragm is mounted to transmit acoustic energy from near the open end of the pipe back to the beginning of the pipe.

The system operates by seamlessly shifting back and forth between two modes of operation, sustaining at least a 6 dB to 9 dB gain enhancement and a 10x reduction of cone displacement and distortion across the useful range of the system.

Starting at 20 Hz, the first side of the driver diaphragm drives the length of the pipe in a manner that operates like a quarter wave tuned pipe, with the energy within the pipe being magnified by the resonant loading of the enclosure. At frequencies at and near 20 Hz, the transducer is loaded by the tuned pipe, substantially reducing the cone motion and distortion (by a factor of 10) while generating the magnified energy (approximately 9 dB more than the direct output of the driver cone) to the exit of the pipe opening. Because the cone motion is minimized, the acoustic output of the second side of the diaphragm has no significant contribution to the output of the system in the frequency range around 20 Hz.

As we move up in frequency, the system transitions from the first operational mode as a quarter wave pipe “direct resonator” to the second operational mode of a “half-wave regenerator.”

As we move from 20 Hz to 40 Hz the system transitions from the first mode to the second, with the two modes sharing the interactions to maintain the 6 to 9 dB of gain and the sub-

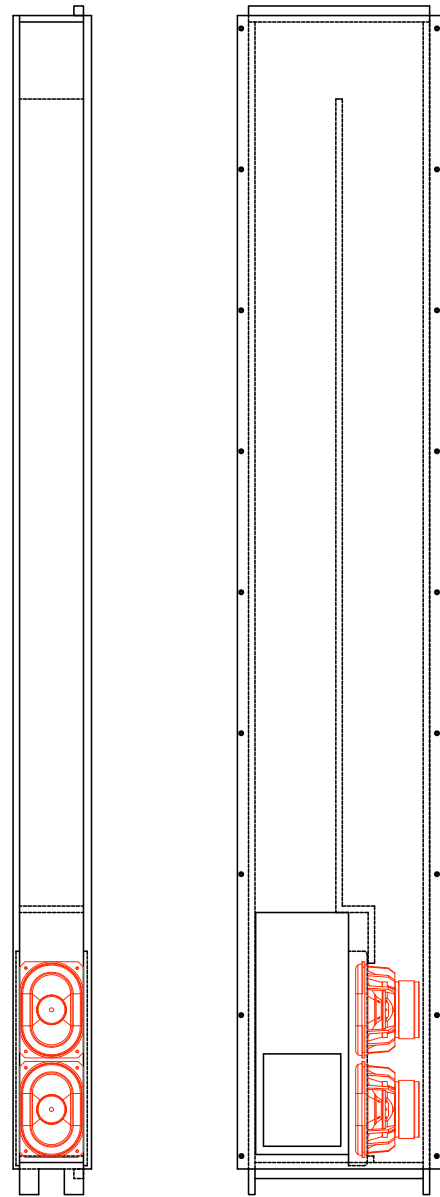

stantial diaphragm excursion reduction. In effect, as one mode weakens, the next strengthens, resulting in a smooth transition without any discontinuities.

The second, regenerative mode, reaches full dominance at 40 Hz. The second mode is caused by the first side of the diaphragm driving acoustic energy into the full length of the pipe with that energy exiting the opening of the pipe. The second side of the diaphragm divides its energy with approximately half of it exiting the pipe opening, and the remaining amount being driven down the length of the pipe to the closed end where the first side of the diaphragm resides. Because the pipe is operating as a half wave regenerator at 40 Hz, the sound waves from the second side of the diaphragm arrives at the beginning of the pipe in-phase with the output of the first side of the diaphragm. So, as the first side of the diaphragm is launching its waveform down the length of the pipe, the output of the second side of the diaphragm arrives at the pipe beginning and is reflected back down the pipe in phase with the first diaphragm side output. At 40 Hz, the total acoustic output is the sum of three acoustic sources:

- 1) The first diaphragm side output, and
- 2) The second diaphragm side acoustic output, and
- 3) The regenerative output of the second side of the diaphragm reflecting back from the closed end of the pipe.

These three acoustic outputs sum to maintain the plus 6 to 9 dB of gain and the second mode loads the diaphragm to minimize cone motion while generating the increased output to cone motion ratio.

As we move from 40 Hz to 60 Hz the system switches back from regenerative mode 2 back to direct resonant mode 1 as the system transitions to a  $\frac{3}{4}$  wave resonant pipe, which enhances system output and reduces cone displacement as in the first  $\frac{1}{4}$  pipe mode.

As we move above 60 Hz towards 80 Hz, we once again start to transition out of direct resonant mode and we cross over the output to match the upper system, or we optimize the system for greater bandwidth, and the repeat the multi-modal transitions.

So to repeat, we start with a  $\frac{1}{4}$  wave direct resonator fully dominating at 20 Hz, and move to approximately 30 Hz where the direct resonator shares its modal activity equally with the  $\frac{1}{2}$  wave regenerator, and then move on to 40 Hz wherein the  $\frac{1}{2}$  wave regenerator mode fully dominates, and as we move up in frequency we transition to shared modalities at approximately 50 Hz, with full direct resonator mode dominating again at 60 Hz, and then the transition starts over again.



Wisdom Audio

Throughout the pass-band of the system, when properly aligned, the transitions are totally seamless with substantially flat amplitude response over the complete operating range of the subwoofer.

To restate the advantages of the Regenerative Transmission Line system:

- Increased efficiency and maximum output over the total pass-band of the system
- Decreased diaphragm excursion and distortion over the total system pass-band
- Low group delay/smooth phase response
- Increased diaphragm control due to minimized cone excursion

Of course, the proof is in the listening.

As implemented in current Wisdom Audio product, this design approach yields strikingly dynamic and detailed bass performance that integrates quite seamlessly with the high performance planar magnetic devices used for midrange and treble frequencies (or any other unusually fast, low-distortion speakers).

Combined with intelligent subwoofer placement in the room and the room correction that is included in all Wisdom Audio Sage Series systems (in the SC-1 System Controller), a new standard of deep bass reproduction is now possible.