

IMPORTANT NOTICE


The Point 3 ships in Passive Mode

To switch the loudspeaker to bi-amplified mode, allowing for active crossovers, please follow the instructions below

Step 1:

Remove the woofer


Begin by removing the woofer closest to the speaker cable jack panel from the enclosure using a #2 Philips bit. The passive crossover network is located behind the woofer.

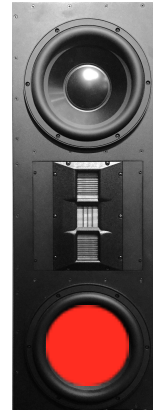

Step 2:

Locate the crossover network


Locate the crossover network inside the enclosure and find the two Molex connectors (see picture to right which shows passive configuration shipped from factory). On the crossover board you will see **Plug A** and **Plug B** Molex connectors.

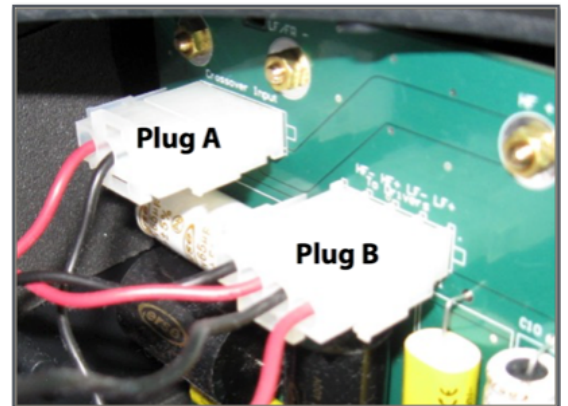

Step 3:

Move the Molex connector

Disconnect both Molex plugs by releasing the side clips. Then connect the 4-conductor **Plug B** connector to the **Plug A** receptacle (see picture to left). **Plug A** does not need to be reconnected. The drivers are now directly connected to the speaker cable jack panel and are ready for bi-amplification and active crossovers.

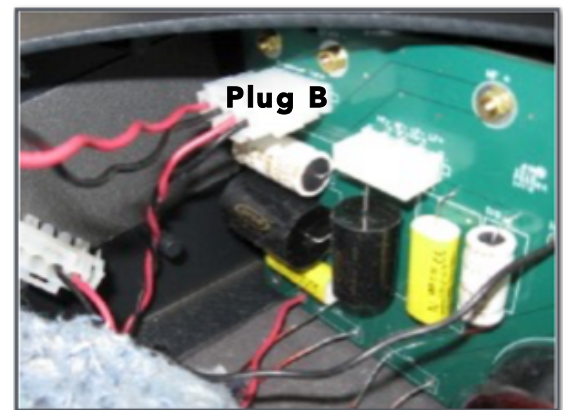

Step 4:

Reinstall the woofer

Reinstall the woofer into the enclosure using the supplied screws. We recommend using a hand screwdriver or set your drill/driver to a low torque setting.