


Tilt Adjustment Compensation - Manual Addendum

The Vesa Kit includes the following parts to allow for adjustment of the soundbar front face tilt angle up and down relative to the TV. This allows adjustment so that the front face of the soundbar can match the TV, or be tilted or aimed slightly up or down as needed.

Parts Included:




- 4/ea Levelling Washers (2 per side must be used) – adjustable $\pm 3^\circ$
- 2/ea Angle Wedge Shim – Fixed 3° up angle
- 2/ea M6 x 20mm Hex Cap bolts (used with Wedge Mount)

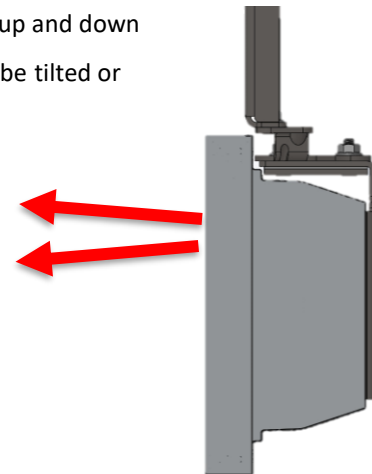

Installation and use of the Levelling Washer (recommended for all TV sizes):

Note: Be sure to support the bottom of the Soundbar while making changes, or use a helper to hold it in place.

1. Place one set of washers (one cup and one cone) on the stud at the bottom of the slide plate, and one set of washers over the top of the mating flange under the bolt, as shown below.
2. Snug the top bolt down by hand, and adjust the angle of the soundbar as needed, up to ± 3 degrees tilt.
3. Tighten the top nut fully to lock the angle in place.

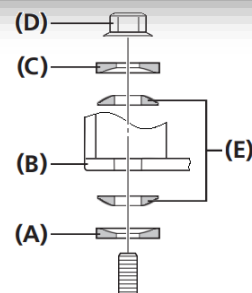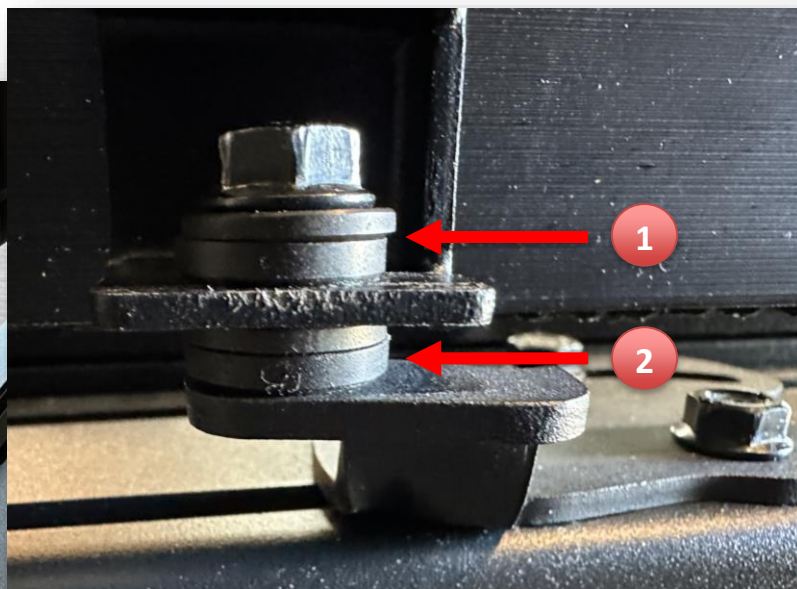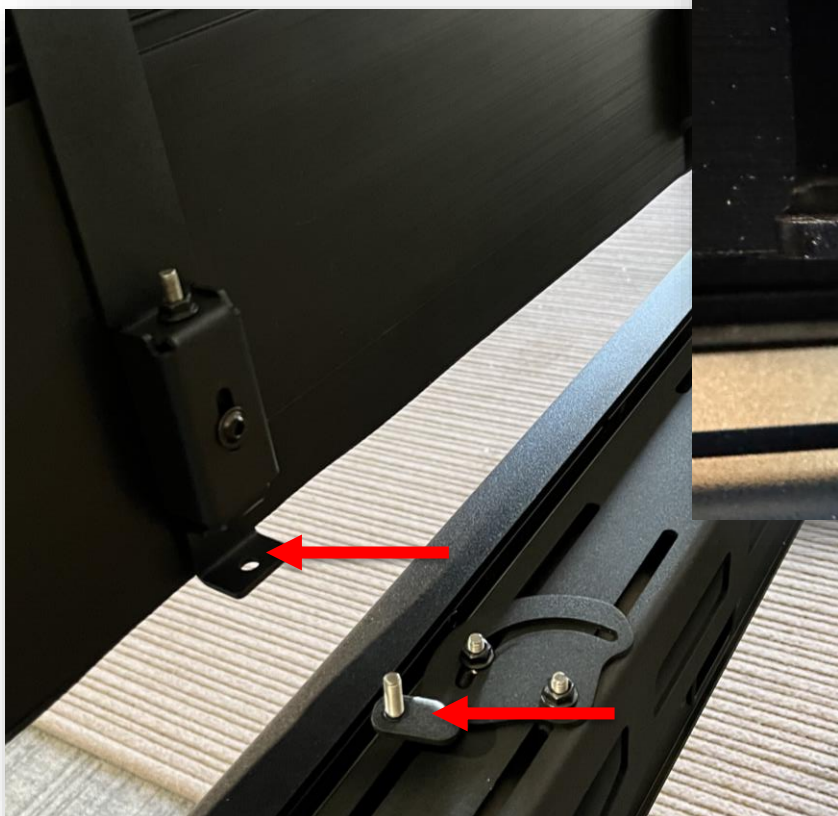

Tilt Adjustment Compensation - Manual Addendum

Installation of the Wedge Angle (Recommended for all TV that are deeper the 2" / 50mm):

Note: Be sure to support the bottom of the Soundbar while making changes, or use a helper to hold it in place.

1. Remove the bottom M6 hex cap bolt from the bottom of the Spider Plate that holds the soundbar to the Vesa mount
2. Loosen, but do not remove, the top M6 hex cap bolt from the top of the Spider Plate.
3. Slide the Wedge Shim from the bottom into place tighten the top bolt.
4. Using the included (longer) M6 bolt, screw into the bottom mounting holes and tighten.

