



Accessing the SA-8 DSP - First Time Setup

PLEASE READ THE BELOW INSTRUCTIONS BEFORE BEGINNING FIRST TIME SETUP AND CONNECTION TO THE SA-8DSP AMPLIFIER

For latest software and firmware updates go to www.wisdomaudio.com/electronics-2/

Wisdom Audio recommends using Firefox Web-browser on both Windows and MacOS


The SA-x DSP Amplifiers are configured via ethernet by accessing the Speaker Wizard from a web browser. There are several connection options below. For multiple amplifiers on a single network, we recommend connecting one at a time, and renaming them with a unique name or Static IP Address.

First Time Setup - Use Direct Connection using Ethernet without a Network or Router

The simplest option is to connect directly without a router. By default, the SA-8 will have an IP Address of 169.254.0.8. Note that you can only connect one (1) SA-x at a time with this method and your computer must have a wired ethernet connection. A switch (*not a router*) can also be used to simplify the connections. WiFi cannot be used.

Connect the SA-8 unit to the Ethernet port of your computer by plugging an Ethernet cable from the computer directly to the SA-x without a router or switch. Turn on the unit and take it out of standby.

Open your web browser and enter the IP Address of 169.254.0.8/wizard.html to access the setup wizard.

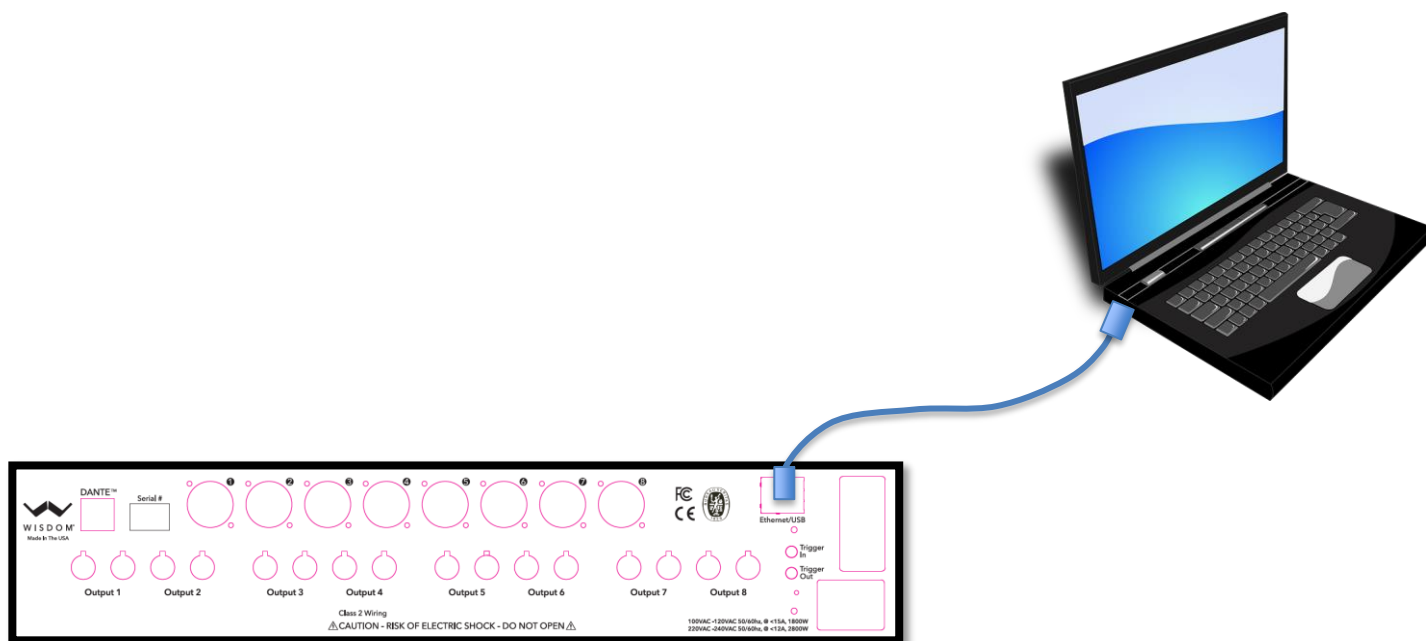

All specifications are subject to change at any time in order to improve the product.

Wisdom Audio | 1572 College Parkway, Suite 164 | Carson City, NV 89706 | 775-887-8850 | information@wisdomaudio.com | www.wisdomaudio.com
© 2022 Wisdom Audio Corporation. All rights reserved. Wisdom and the Wisdom logo are registered trademarks of Wisdom Audio